

AS440-A



技术参数 TECHNICAL DATA

检测与电源输入: 电压 120(95~132)/240(190~264)VAC 单相二线

磁场输出: 电压 207VAC输入时最大90 VDC

电流 连续4A 非连续10秒内10A

调压精度: < ±1% RMS (发动机转速变动在4%内)

SENSING/POWER INPUT

Voltage:120(95~132VAC) or 240(190~264VAC),1 phase, 2 wire

MAGNETIC FIELD OUTPUT

voltage:max 90VDC at 207VAC input

Current:continuous 4A

intermittent 10A within 10 seconds

PRESSURE REGULATING ACCURACY

< +/-1% RMS with 4% engine governing

SX460-A



技术参数 TECHNICAL DATA

检测与电源输入: 电压 120(95~132)/240(190~264)VAC

单相二线 以跨接铜片选择

磁场输出: 电压 207VAC输入时最大90 VDC

电流 连续4A 非连续10秒内10A

调压精度: < ±1% RMS (发动机转速变动在4%内)

SENSING/POWER INPUT

Voltage:120 (95-132VAC) or 240 (190-264VAC)

1 phase 2 wire ,with copper jumper options

MAGNETIC FIELD OUTPUT

voltage:max 90VDC at 207VAC input

Current: continuous 4A


intermittent 10A within 10 seconds

PRESSURE REGULATING ACCURACY

< +/-1% RMS with 4% engine governing



RSK1001

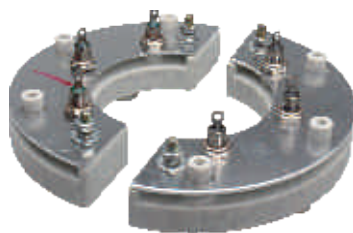


RSK2001



ZX25-12



ZX70-12

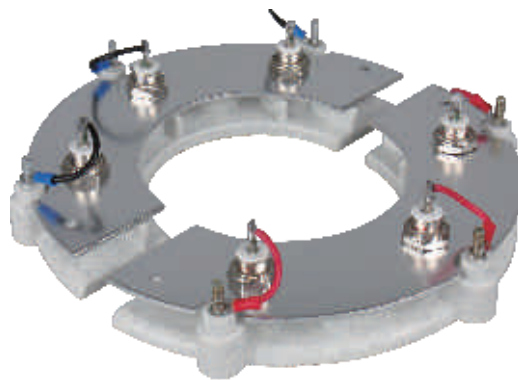

RSK5001