

### MX321-A



#### 技术参数 TECHNICAL DATA

**检测输入:** 电压 190~264VAC 二相或三相

**电源输入(PMG):** 电压 170~220VAC 三相三线

**磁场输出:** 电压 最大 120 VDC 电流 连续3.7A 非连续10秒内6A

**调压精度:** < ±0.5% RMS (发动机转速变动在4%内)

#### SENSING INPUT

Voltage: 190-264VAC max, 2 phase, 3 wire

#### POWER INPUT(PMG)

Voltage: 170-220VAC, 3 phase, 3 wire

#### MAGNETIC FIELD OUTPUT


voltage:max 120VDC

Current: continuous 3.7A,intermittent 6A within 10 seconds

#### PRESSURE REGULATING ACCURACY

< +/-0.5% RMS with 4% engine governing

### MX341-A

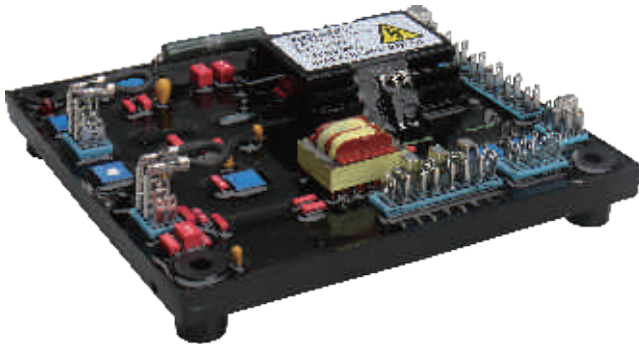

#### 技术参数 TECHNICAL DATA

**检测输入:** 电压 190~264VAC 单相二线

**电源输入(PMG):** 电压 170~220 VAC 三相三线

**磁场输出:** 电压 最大 120 VDC 电流 连续2.7A 非连续10秒内6A

**调压精度:** < ±0.5% RMS (发动机转速变动在4%内)

#### SENSING INPUT

Voltage: 190-264VAC max, 1 phase, 3 wire

#### POWER INPUT(PMG)

Voltage: 170-220VAC, 3 phase, 3 wire

#### MAGNETIC FIELD OUTPUT

voltage:max 120VDC

Current: continuous 2.7A,intermittent 6A within 10 seconds

#### PRESSURE REGULATING ACCURACY

< +/-0.5% RMS with 4% engine governing

### SX440-A



#### 技术参数 TECHNICAL DATA

**检测与电源输入:** 电压 190~264VAC 单相二线

**磁场输出:** 电压 207VAC输入时最大90VDC

电流 连续4A 非连续10秒内10A

**调压精度:** < ±1% RMS (发动机转速变动在4%内)

#### SENSING/POWER INPUT

Voltage: 190-264VAC , 1 phase, 2 wire

#### MAGNETIC FIELD OUTPUT

voltage:max 90VDC at 207VAC input

Current: continuous 4A

intermittent 10A within 10 seconds

#### PRESSURE REGULATING ACCURACY

< +/-1% RMS with 4% engine governing