


### R450

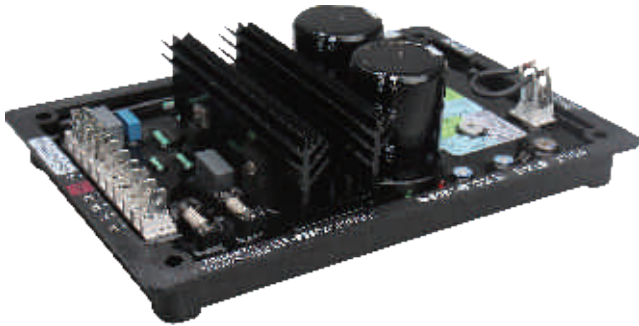

#### 技术参数 TECHNICAL DATA

**检测输入:** 电压 95~480VAC

**电源输入:** 电压 40~150VAC 三相

**磁场输出:** 电压 120VAC 输入时最大 160 VDC 电源 最大 10A

**调压精度:** <  $\pm 0.5\%$  RMS (发动机转速变动在4%内)

#### SENSING INPUT

Voltage: 95-480VAC

#### POWER INPUT

Voltage: 40-150VAC , 3 phase

#### MAGNETIC FIELD OUTPUT


voltage: max 160VDC at 120VAC input

Current: max 10A

#### PRESSURE REGULATING ACCURACY

<  $\pm 0.5\%$  RMS with 4% engine governing

### R449

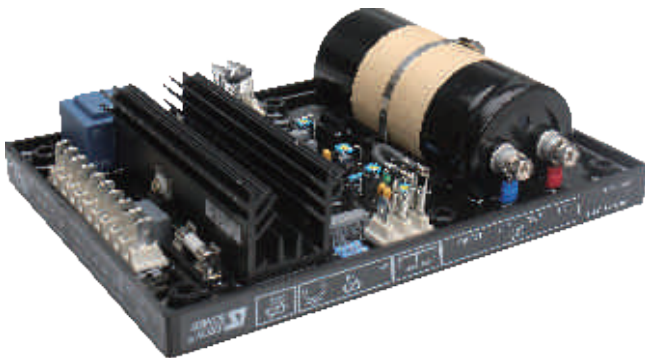

#### 技术参数 TECHNICAL DATA

**检测输入:** 电压 95~480VAC

**电源输入:** 电压 40~150VAC 三相

**磁场输出:** 电压 120VAC 输入时最大 160 VDC 电源 最大 10A

**调压精度:** <  $\pm 0.5\%$  RMS (发动机转速变动在4%内)

#### SENSING INPUT

Voltage: 95-480VAC

#### POWER INPUT

Voltage: 40-150VAC , 3 phase

#### MAGNETIC FIELD OUTPUT

voltage: max 160VDC at 120VAC input

Current: max 10A

#### PRESSURE REGULATING ACCURACY

<  $\pm 0.5\%$  RMS with 4% engine governing

### R448



#### 技术参数 TECHNICAL DATA

**检测输入:** 电压 95~480VAC

**电源输入:** 电压 40~150VAC 三相

**磁场输出:** 电压 120VAC 输入时最大 160 VDC 电源 最大 10A

**调压精度:** <  $\pm 0.5\%$  RMS (发动机转速变动在4%内)

#### SENSING INPUT

Voltage: 95-480VAC

#### POWER INPUT

Voltage: 40-150VAC , 3 phase

#### MAGNETIC FIELD OUTPUT

voltage: max 160VDC at 120VAC input

Current: max 10A

#### PRESSURE REGULATING ACCURACY

<  $\pm 0.5\%$  RMS with 4% engine governing